PUMPER

BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM
18,000 lb Oshkosh Tak-4 Axle

AXLE, REAR
24,000 lb Meritor Axle

ENGINE
450 HP Cummins L9

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
19" Extended Stainless Steel

CAB
7010 Enforcer Cab

BODY

WATER TANK
750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR
30.75" FF Rollup Rear Compt

COMPT, PUMPER, DRIVER SIDE
152" Rollup Full Height Front & Rear FDLER

COMPT, PUMPER PASS. SIDE
152" Rollup Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE
48" Control Zone Side Mount

PUMP
1500 GPM Waterous CSU

CROSSLAYS, 1.50"
(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"
(1) 2.50" Standard Capacity

SPEEDLAYS
SpeedLays Not Required

GENERATOR
Generator Not Required

Foam System
Husky 3 Foam System

Foam Cell
20 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

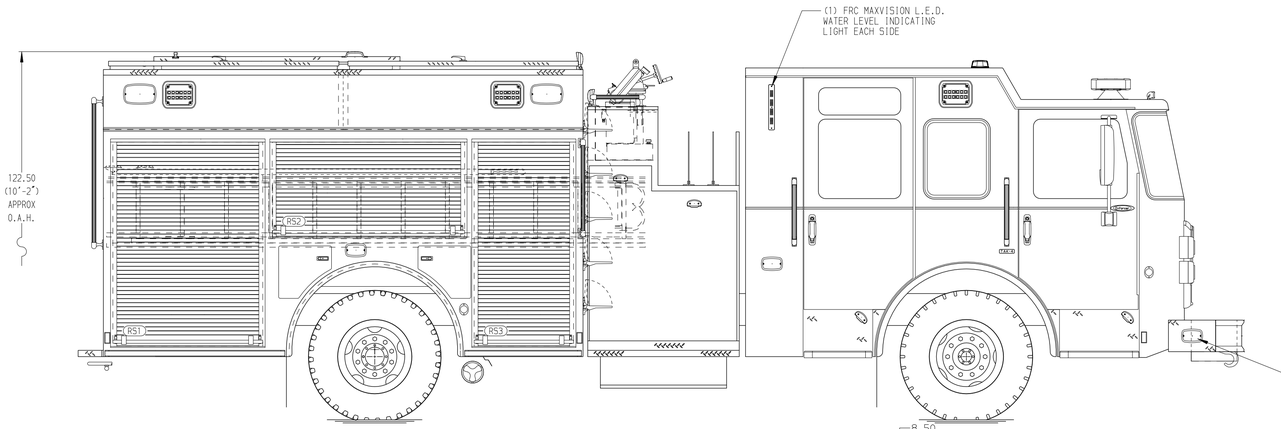

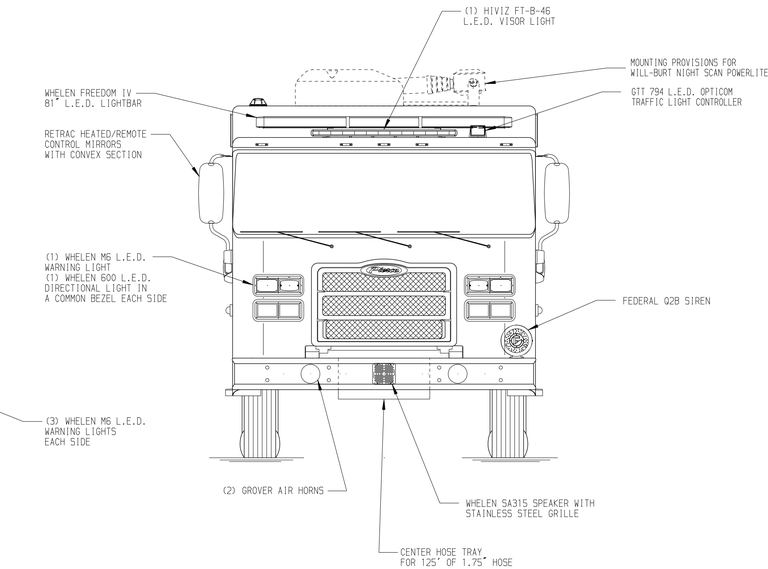

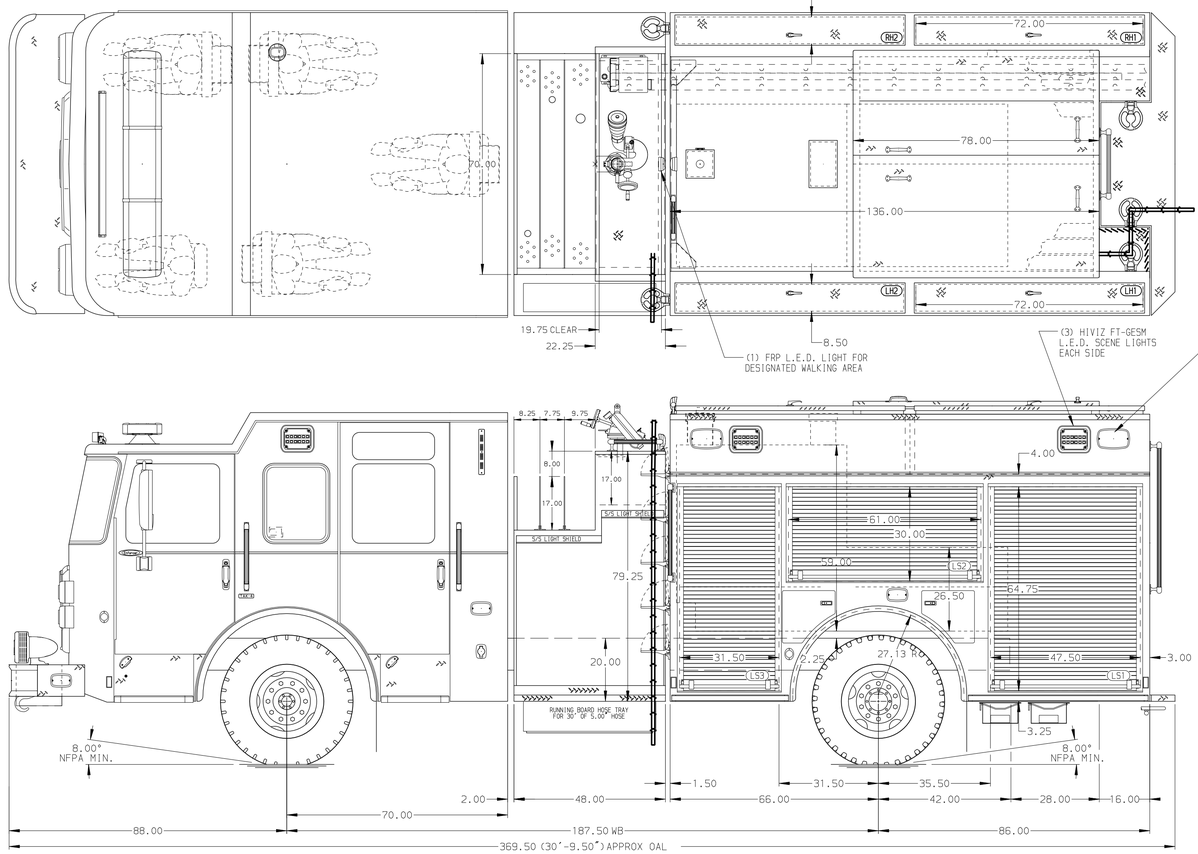

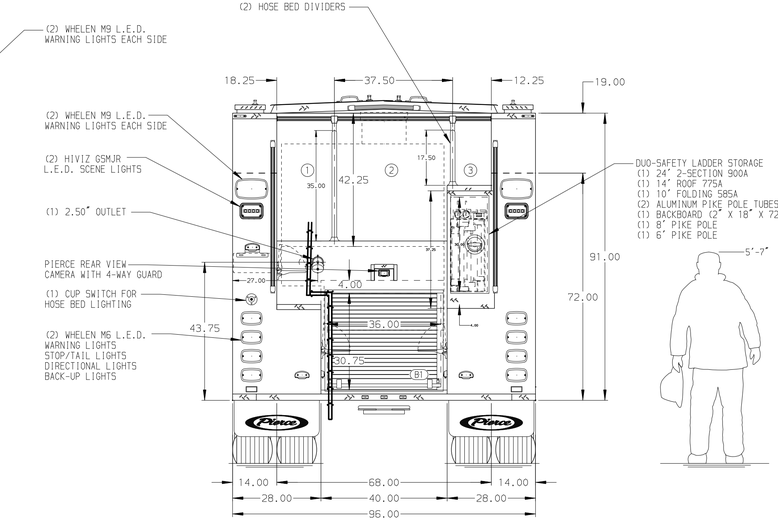

HOSEBED CAPACITY

BED 1
750' OF 3.00" D.J. POLY HOSE

BED 2
1000' OF 5.00" D.J. POLY HOSE

BED 3
250' OF 3.00" D.J. POLY HOSE

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

JOB NO.	37092
SCALE	1:24
DATE	
DRAWN BY	COL
DATE	09AUG21
CHECKED BY	THS
DATE	10AUG21
SHEET SIZE	D
SHEET NO.	1 OF 1

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

TITLE: Pierce Pumper Approval Drawing
–
FOR: Jackson Fire Department
–

DWG NO. 37092AD

REV	DATE	BY	CH
V	02DEC21	MMF	COL

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CREW CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. FIVE ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
6. TWO 120V RECEPTACLES LOCATED PER SHOP ORDER
7. TWO FLOOR MOUNTED TRAYS LOCATED IN COMPARTMENT PER SHOP ORDER

View File Created 02-DEC-2021 12:03:24